

ZIRKOL CIRCLE

ZIRKOL C ist eine Familie von kreisförmigen Hängeleuchten, die sich ideal für die allgemeine und dekorative Beleuchtung von Räumen eignen. Gehäuse aus eloxiertem Aluminium und Opalschutz für homogene Beleuchtung. Direkte oder doppelte Lichtemission mit hohem Lichtstrom und mit drei verschiedenen Farbtemperaturen. Fernnetzgerät und dimmer-Modul im Lieferumfang enthalten.



HOME Ø 0,85M | UP-DOWNLIGHT - 2700K - DALI

LAMPING

Source	LED strip
Total power	70W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	4000lm
Initial luminaire efficacy	57lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black RAL 9016 white shipped assembled

Customization options

Accessories	Canopy, for concrete ceiling
Net lamp weight	3 kg

Codes

BZRC1708G15DBO
BZRC1708G15DNE
BZRC1708G15DOR

Structure

white
black
gold


PACKAGE

Package 01	Dimension: 115x115x12 cm / Gross weight: 5,5 kg
------------	---




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

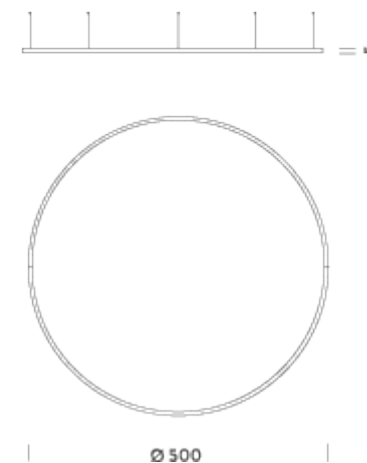

HOME Ø 0,85M | UP-DOWNLIGHT - 3000K - DALI

LAMPING

Source	LED strip
Total power	70W
Emission	diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	4400lm
Initial luminaire efficacy	63lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø85x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 x driver 75W (110/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cables (length from 3m to 0,5m) ceiling attachment included RAL 9005 black RAL 9016 white shipped assembled

Customization options

Accessories	Canopy, for concrete ceiling
Net lamp weight	3 kg

Codes

BZRC1708G15WBO
BZRC1708G15WNE
BZRC1708G15WOR

Structure

white
black
gold


PACKAGE

Package 01	Dimension: 115x115x12 cm / Gross weight: 5,5 kg
------------	---




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

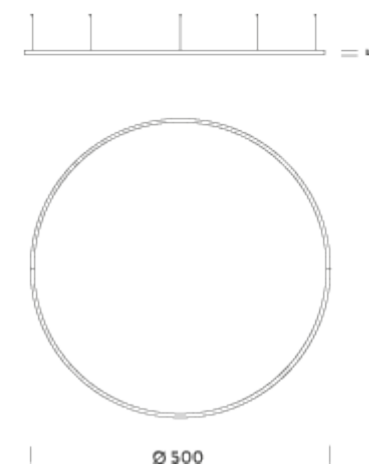

HOME Ø 1M | UP-DOWNLIGHT - 2700K - DALI

LAMPING

Source
Total power
Emission
Switching
Tension
Color temperature
Luminous flux
Initial luminaire efficacy
Initial chromaticity
Typ CRI
Energy class
IP class
Dimensions
Materials
Ambient temperature range
Performance ambient temperature
Notes

LED strip
90W
Diffused orientable
DALI
24V
2700K
5231lm
58lm/W
SDCM<3
90
E
40
Ø100x5cm
aluminium
0°C / +35°C
25°C

included: round canopy with 1 x driver 100W (110-240V) | 1 x dimmer DALI | 1 x electrical cable 4m | 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment | RAL 9005 black | RAL 9016 white | shipped assembled

Customization options

Light configurations, separate light control, control systems

Accessories

Canopy, for concrete ceiling | Ceiling attachment, for metal cable | Ceiling plate, for false ceiling

Net lamp weight

4 kg

Codes

BZRC1710G15DBO
BZRC1710G15DNE
BZRC1710G15DOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

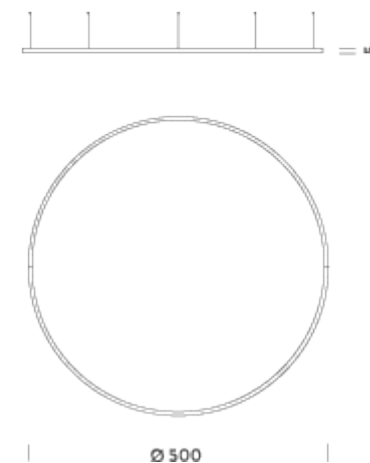

HOME Ø 1M | UP-DOWNLIGHT - 3000K - DALI

LAMPING

Source	LED strip
Total power	90W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	5539lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø100x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 x driver 100W (110-240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled

Customization options

Accessories

Net lamp weight

Codes

BZRC1710G15WBO
BZRC1710G15WNE
BZRC1710G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 115x115x12 cm / Gross weight: 6,5 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

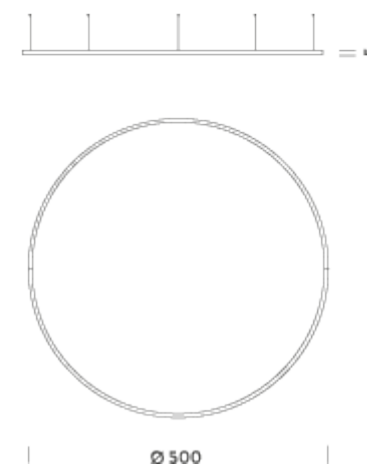

HOME Ø 1,5M | UP-DOWNLIGHT - 2700K

LAMPING

Source	LED strip
Total power	136W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	7847lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø150x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 x driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled

Customization options

Accessories

Net lamp weight

Codes

BZRC1715G15DBO
BZRC1715G15DNE
BZRC1715G15DOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

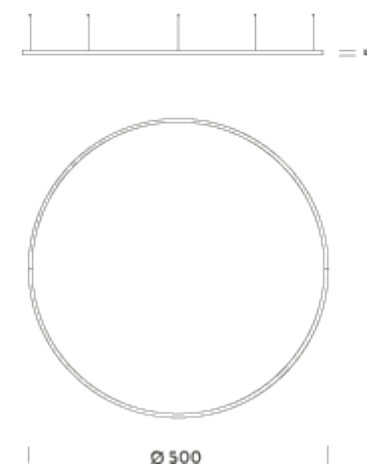

HOME Ø 1,5M | UP-DOWNLIGHT - 3000K - DALI

LAMPING

Source	LED strip
Total power	136W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	8308lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø150x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: round canopy with 1 x driver 150W (220/240V) 1 x dimmer DALI 1 x electrical cable 4m 3 x adjustable metal cable (length from 3m to 0,5m) ceiling attachment RAL 9005 black RAL 9016 white shipped assembled

Customization options

Accessories

Net lamp weight

Codes

BZRC1715G15WBO
BZRC1715G15WNE
BZRC1715G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 165x165x12 cm / Gross weight: 8,9 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

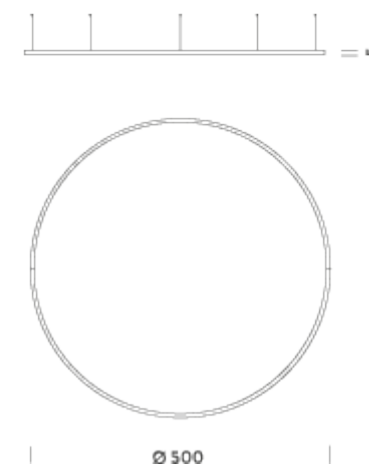

Ø 2M | UP-DOWNLIGHT - 2700K - DALI

LAMPING

Source	LED strip
Total power	180W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	10500lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø200x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces

Customization options
light configurations, separate light control, control systems

Accessories
Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

Net lamp weight
7,2 kg

Codes

BZRC1720G15DBO
BZRC1720G15DNE
BZRC1720G15DOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 210x110x15 cm / Gross weight: 12,6 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

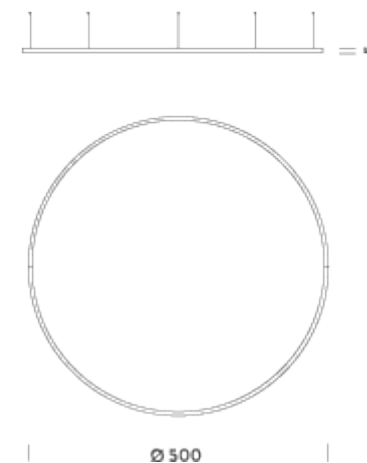

Ø 2M | UP-DOWNLIGHT - 3000K - DALI

LAMPING

Source	LED strip
Total power	180W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	11078lm
Initial luminaire efficacy	62lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø200x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 1 x driver 250W (220/240V) 1 x dimmer DALI 2 x electrical cable 5m 4 x adjustable metal cable length 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 2 pieces

Customization options
light configurations, separate light control, control systems

Accessories
Canopy, for concrete ceiling | Canopy box, 1 driver, 2 electrical cables | Ceiling plate, for false ceiling

Net lamp weight
7,2 kg

Codes

BZRC1720G15WBO
BZRC1720G15WNE
BZRC1720G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 210x110x15 cm / Gross weight: 12,6 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

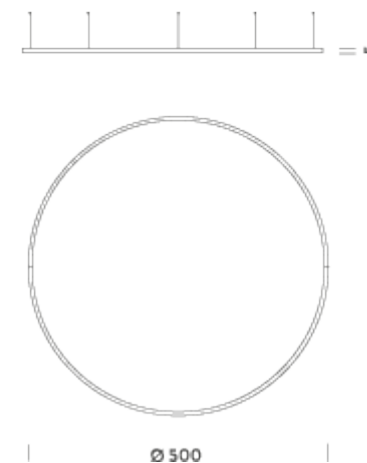

Ø 3M | UP-DOWNLIGHT - 2700K - DALI

LAMPING

Source	LED strip
Total power	268W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	15640lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø300x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 3 x drivers 100 (110/240V) 3 x dimmer DALI 3 x electrical cable 5m 6 x adjustable metal cable length 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 3 pieces

Customization options
light configurations, separate light control, control systems

Accessories
Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

Net lamp weight
12,3 kg

Codes

BZRC1730G15DBO
BZRC1730G15DNE
BZRC1730G15DOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 20,3 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

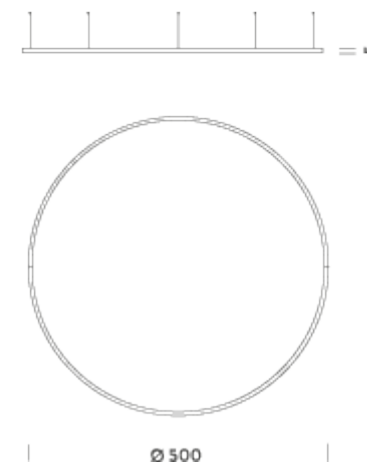

Ø 3M | UP-DOWNLIGHT - 3000K - DALI

LAMPING

Source	LED strip
Total power	268W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	16476lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø300x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 3 x drivers 100 (110/240V) 3 x dimmer DALI 3 x electrical cable 5m 6 x adjustable metal cable length 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 3 pieces

Customization options

light configurations, separate light control, control systems

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

Net lamp weight

12,3 kg

Codes

BZRC1730G15WBO
BZRC1730G15WNE
BZRC1730G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 20,3 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

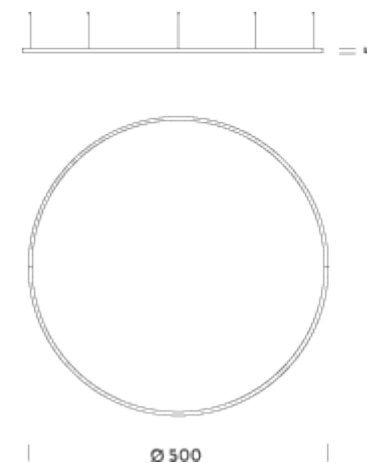

Ø 5M | UP-DOWNLIGHT - 2700K - DALI

LAMPING

Source	LED strip
Total power	452W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	2700K
Luminous flux	26100lm
Initial luminaire efficacy	58lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø500x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	included: 5 x driver 100W (110/240V) 5 x dimmer DALI 5 x electrical cable 5m 10 x adjustable metal cable 3m, ceiling attachment remote driver RAL 9005 black RAL 9016 white shipped in 5 pieces

Customization options

light configurations, separate light control, control systems

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

Net lamp weight

20,3 kg

Codes

BZRC1750G15DBO
BZRC1750G15DNE
BZRC1750G15DOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 28,3 kg




Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

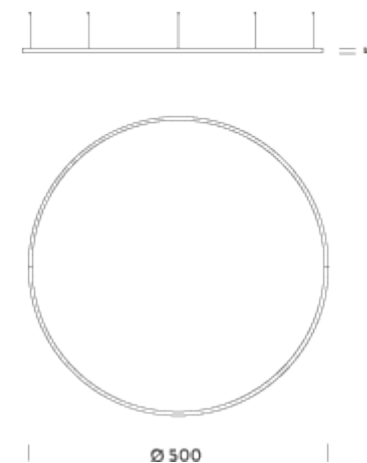

Ø 5M | UP-DOWNLIGHT - 3000K - DALI

LAMPING

Source	LED strip
Total power	452W
Emission	Diffused orientable
Switching	DALI
Tension	24V
Color temperature	3000K
Luminous flux	27695lm
Initial luminaire efficacy	61lm/W
Initial chromaticity	SDCM<3
Typ CRI	90
Energy class	E
IP class	40
Dimensions	ø500x5cm
Materials	aluminium
Ambient temperature range	0°C / +35°C
Performance ambient temperature	25°C
Notes	

included: 5 x driver 100W (110/240V) | 5 x dimmer DALI | 5 x electrical cable 5m | 10 x adjustable metal cable 3m, ceiling attachment | remote driver | RAL 9005 black | RAL 9016 white | shipped in 5 pieces

Customization options

light configurations, separate light control, control systems

Accessories

Canopy, for concrete ceiling | Canopy box, 1 driver, 1 electrical cable | Ceiling plate, for false ceiling

Net lamp weight

20,3 kg

Codes

BZRC1750G15WBO
BZRC1750G15WNE
BZRC1750G15WOR

Structure

white
black
gold

PACKAGE


Package 01

Dimension: 310x110x15 cm / Gross weight: 28,3 kg

Certificazioni



CIRCLE HOME 0,85-1-1,5m



CIRCLE 2-3-5m

