


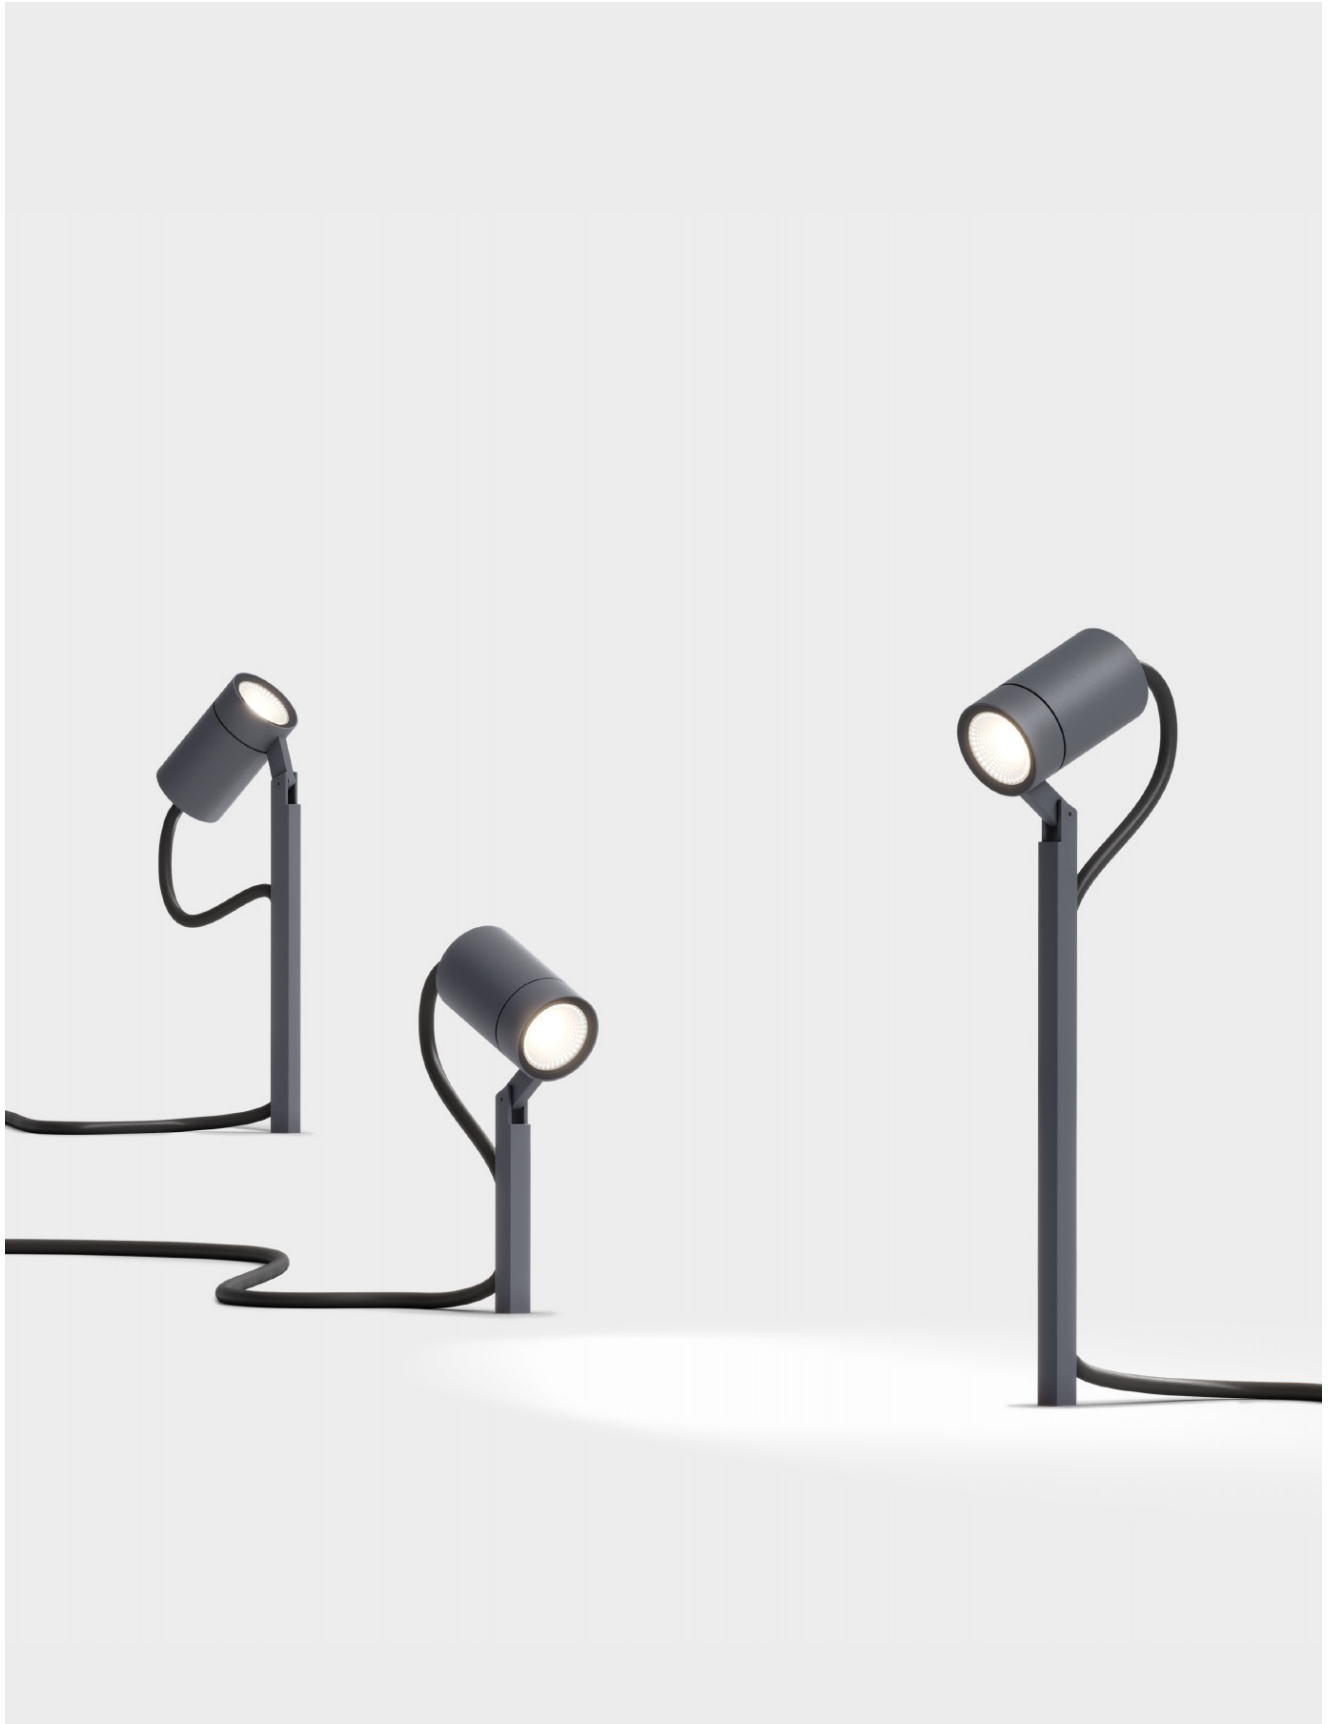

piek Design: Sebastian David Büscher

piek Design: Sebastian David Büscher


Lichttechnik:
230V Power LED
2700K
L70/50.000 h

Reflektor: Flood . Abstrahlwinkel 38°

dimmbar über Phasenabschrittdimmer

Zuleitung:
3 m Leuchte (05RN8-F 3G0,75 mm²)
inkl. Schutzkontaktstecker
anschlussfertig

Montage:
für unbefestigte Beet- und Grünflächen
ortsveränderlich

Material:
Kopf: Aluminiumguss pulverbeschichtet + Klarglas
Stab: Edelstahl pulverbeschichtet

Schutzart: IP65

**Dieses Produkt enthält eine Lichtquelle
der Energieeffizienzklasse F**

Lichtrichtung:



light technology:
230V Power LED
2700K
L70/50.000 h

reflector: flood . beam angle 38°

dimmable via trailing edge dimmer

supply cable:
3 m luminaire (05RN8-F 3G0,75 mm²)
incl. safety plug
ready to connect




assembly:
for unpaved beds and greens
movable

material:
head: aluminium die-casting powder-coated + clear glass
pole: stainless steel powder-coated

protection class: IP65

**This product contains a light source of
energy efficiency class F**

light direction:



	Farbe colour		Art.-Nr. item no.	Systemleistung system performance
piek 25		anthracite RAL 7016	92071-27-AN	6 W/220 lm
		cool brown	92071-27-CB	6 W/220 lm
		deep black RAL 9005	92071-27-BL	6 W/220 lm
piek 50		anthracite RAL 7016	92070-27-AN	6 W/220 lm
		cool brown	92070-27-CB	6 W/220 lm
		deep black RAL 9005	92070-27-BL	6 W/220 lm
piek 100		anthracite RAL 7016	92072-27-AN	6 W/220 lm
		cool brown	92072-27-CB	6 W/220 lm
		deep black RAL 9005	92072-27-BL	6 W/220 lm

+ Optional mit Schweizer Stecker . Art.-Nr. + Preise in separater Preisliste + www.IP44.de
with Swiss plug as an option . item no. + prices in separate price list + www.IP44.de

+ Anschluss optional mit IP44.DE connect
connection with IP44.DE connect as an option

+ verwandte Produkte related products . piek . piek lettura . piek mini . piek mini solar

Größe in mm
size in mm